



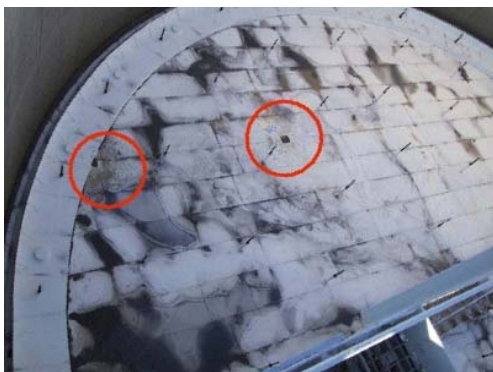

Worldwide repairs carried out with PolymerMetal®

REP-# 174

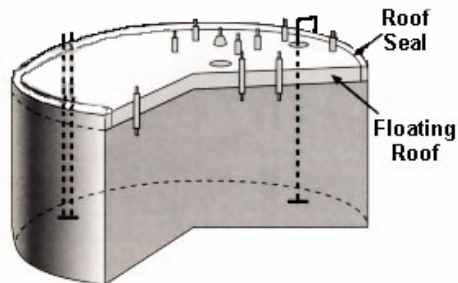

Alternatively to extensive conventional repair procedures (e.g. welding works) at floating roof tanks an expensive drain of the liquid stored in the tank can if applicable be abstained from by using a repair method with PolymerMetal®. MM-metal oL-steelceramic can be applied on problematic surfaces (contamination due to oil, fuel et cetera). The additional purpose of the flexible material MM-Elastomer is effective against tensions.

Here are further information available for the application at floating roof tanks:

www.metalexistence.com/f-roof

MultiMetal
the MetalExistenceCompany®